



PD2N-CAS DALI-2 CONNECTOR SYSTEM

For smaller areas with integrated DALI-2 power supply

- Preassembled, 5-pole plug with a 2m extension cord (halogen-free Dca cable) - Rutab Building Installation Connector System
- Casambi-enabled occupancy detector
- DALI-2 interface for controlling digital dimmable ECGs in broadcast/multicast mode
- Mixed light measurement with internal and external light sensor
- Adjustment of the reflection factor
- Functions adjustable via Casambi app
- Application examples: Smaller offices, Corridors, Open-plan offices, Conference rooms, Classrooms/Seminar rooms

Specification

SUPPLY VOLTAGE	230V AC $\pm 10\%$ / 50Hz
POWER CONSUMPTION	approx. 0,5W
MATERIAL ENCLOSURE	Polycarbonate, UV-resistant
TEMPERATURE RANGE	-5°C...+40°C
INGRESS PROTECTION	IP20
PROTECTION CATEGORY	II
LIGHT VALUES	1 - 4000 Lux
AREA OF COVERAGE	circular 360°

RANGE OF COVERAGE

Ø H 2.50m / T = 18°C:
 seated 4m
 tangential 10m
 radial 6m

MOUNTING HEIGHT MIN./MAX./RECOMMENDED

2m/10m/2,5m

RECOMMENDED HEIGHT FOR MOUNTING

2,5m


LIGHT MEASUREMENT

Mixed light, daylight + artificial light

FOLLOW-UP TIME

1 sec - 60min

Wiring

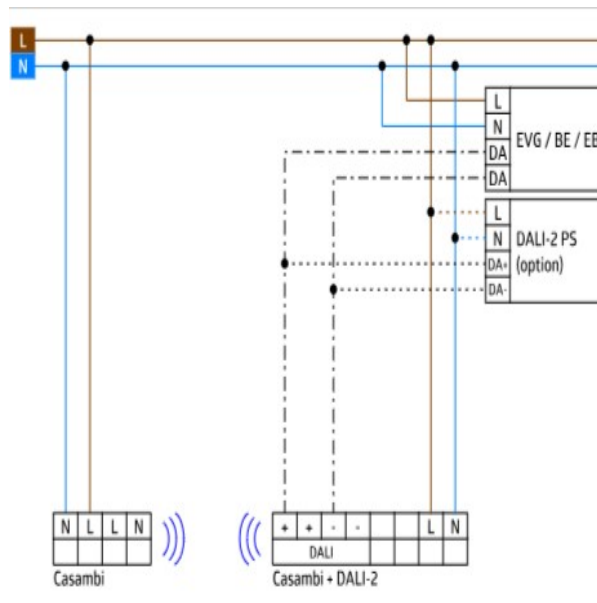

Variants

E-NUMBER	DESCRIPTION	INGRESS PROTECTION	COLOUR	PCS/PACK
1303003	PD2N-CAS DALI-2 Connector System	IP20	White	1