


PD2N-S

Specification

SUPPLY VOLTAGE	110-240VAC / 50-60Hz
POWER CONSUMPTION	approx. 0,2W
MATERIAL ENCLOSURE	Polycarbonate, UV-resistant
TEMPERATURE RANGE	-25°C...+50°C
PROTECTION CATEGORY	II
AREA OF COVERAGE	circular 360°
RANGE OF COVERAGE	Ø H 2.50m / T = 18°C: seated 4m tangential 10m radial 6m
MOUNTING HEIGHT MIN./MAX./RECOMMENDED	2 m / 5 m / 2.5 m
RECOMMENDED HEIGHT FOR MOUNTING	2,5m

Measurements

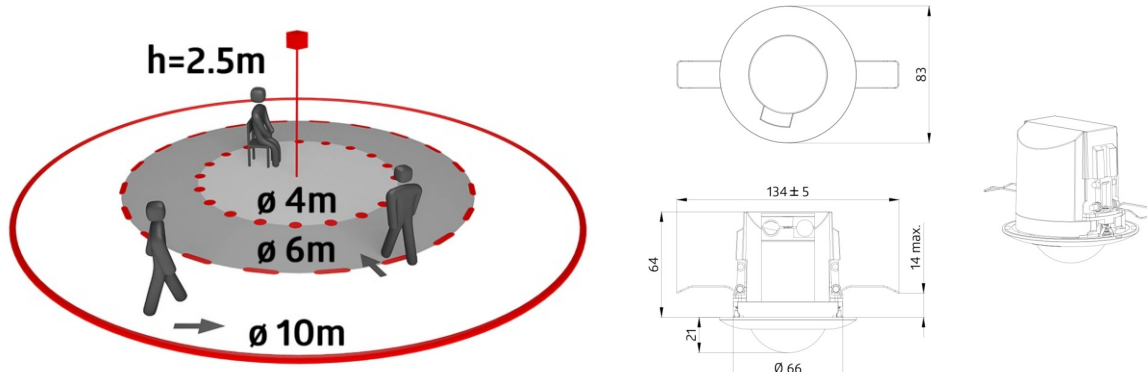

Variants

E-NUMBER	ARTICLE NO.	DESCRIPTION	INGRESS PROTECTION	COLOUR	PCS/PACK
1303006	93240	PD2N-S	IP20	White	1
1301616	93454	Förhöjningsram PD2N H	IP54	White similar to RAL 9010	1
1313683			-	White	1