


## PD4N-S


### Specification

SUPPLY VOLTAGE	110-240VAC / 50-60Hz
POWER CONSUMPTION	approx. 0,2W
MATERIAL ENCLOSURE	Polycarbonate, UV-resistant
TEMPERATURE RANGE	-25°C...+50°C
INGRESS PROTECTION	IP20
PROTECTION CATEGORY	II
AREA OF COVERAGE	circular 360°
RANGE OF COVERAGE	Ø H 2.50m / T = 18°C: seated 6.40m tangential 24m radial 8m
MOUNTING HEIGHT MIN./MAX./RECOMMENDED	2 m / 10 m / 2.5 m
RECOMMENDED HEIGHT FOR MOUNTING	2,5m

## Measurements

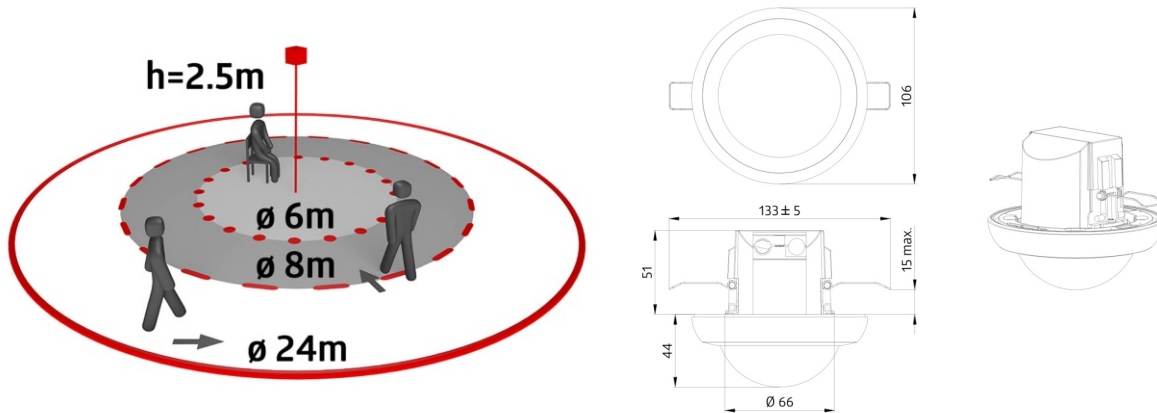

## Wiring

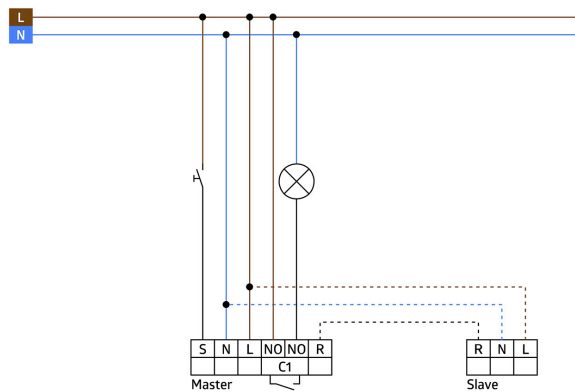

## Variants

E-NUMBER	ARTICLE NO.	DESCRIPTION	INGRESS PROTECTION	COLOUR	PCS/PACK
1303007	93241	PD4N-S	IP20	White	1
1301325	93073	Korridorlins PD4N Typ A	IP20	White similar to RAL 9010	1
1301609	93465	Förhöjningsram PD4N H	IP54	White similar to RAL 9010	1
1313683		Skyddskorg BSK	-	White	1

