


## RC-plus next N 230-KNXs-DX V.7.0

### KNX Deluxe


## Specification

SUPPLY VOLTAGE	24 V DC from KNX-BUS network
POWER CONSUMPTION	12 mA
MATERIAL ENCLOSURE	Polycarbonate, UV-resistant
INGRESS PROTECTION	IP54
SETTINGS	ETS 5 Software
LIGHT VALUES	5 - 2000 Lux
EXTENSION OF THE DETECTION AREA	with detector in slave mode
AREA OF COVERAGE	230°
RANGE OF COVERAGE	H 2.50m: tangential max. 20m radial max. 6m anti-creep max. 4m
MOUNTING HEIGHT MIN./MAX./RECOMMENDED	2m/5m/2.5m
RECOMMENDED HEIGHT FOR MOUNTING	2,5m

## Measurements

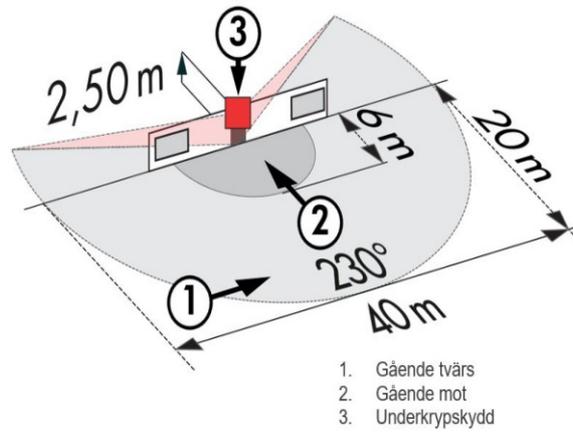

## Wiring

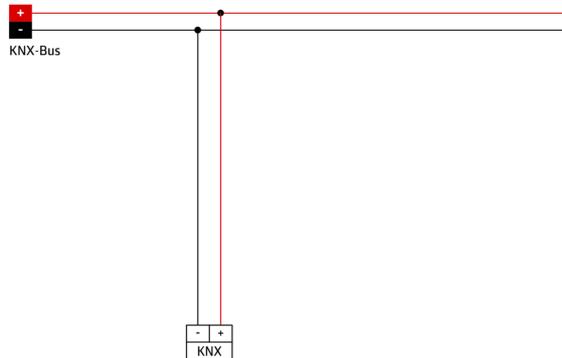

## Variants

E-NUMBER	ARTICLE NO.	DESCRIPTION	MOUNTING	INGRESS PROTECTION	COLOUR	PCS/PACK	EPD / PEP
1740179	93527	RCPN-230-KNXs-DX	Wall	IP54	White	1	Yes
1740180	93528	RCPN-230-KNXs-DX	Wall	IP54	Black	1	Yes
1313680	97004	Outside corner socket RC-plus next	Wall outside corner	-	White	1	
1313636	97024	Outside corner socket RC-plus next	Wall outside corner	-	Black	1	
1300160	92467	Wire basket BSK (Ø 164 x 143 mm)	-	-	White	1	
1739250	92123	IR-PD-KNX	-	-	-	1	
1301369	93067	BLE-IR-ADAPTER	-	-	-	1	