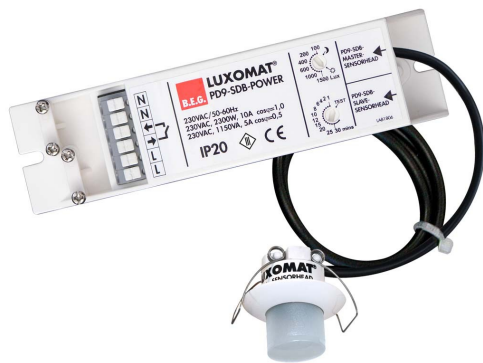


PD9-M-1C-SDB-IP65-GH Till/Från 1-kanalig minidetektor för höga höjder

Specification

SUPPLY VOLTAGE	230V AC $\pm 10\%$ / 50-60Hz
POWER CONSUMPTION	2,2W
MATERIAL ENCLOSURE	Polycarbonate, UV-resistant
TEMPERATURE RANGE	-25°C...+50°C
PROTECTION CATEGORY	II
SETTINGS	Potentiometers and remote control
EXTENSION OF THE DETECTION AREA	with slave detector
AREA OF COVERAGE	circular 360°
RANGE OF COVERAGE	$\varnothing$ H 9m / T = 18°C: tangential 5,4m $\varnothing$ H 6m / T = 18°C: tangential 3,5m
RECOMMENDED HEIGHT FOR MOUNTING	up to 9m
LIGHT MEASUREMENT	Mixed light, daylight + artificial light

For lightning control, potential-free, 1x μ -contact
NO contact with tungsten pre-make contact

Switching power:

2300 W, $\cos \varphi = 1$

1150 VA, $\cos \varphi = 0,5$

300W LED

max. inrush current I_p (20ms) = 80 A

Follow up time:

15 sec - 30 min, Pulse

Switch-on threshold:

10 - 2000 lux

CHANNEL 1

DIMENSIONS	Detector H=49 x $\varnothing$ = 45 mm, Power supply 154 x 38 x 25 mm
VISIBLE PORTION WHEN BUILT INTO CEILING	H x $\varnothing$ mm: 24 x 45
CABLE LENGTH M	3.5
HALOGEN-FREE	Yes

Variants

E-NUMBER	ARTICLE NO.	DESCRIPTION	COLOUR	PCS/PACK
-	92931	PD9-M-1C-SDB-IP65-GH-TAK	White	1
-	92933	PD9-S-SDB-GH-TAK (endast sensordel, kabellängd 3m)	White	1
1313666	92201	IR-PD9	Grey	1
1313664	92159	IR-PD-MINI	Grey	1