

Military Technology





Reliable Power Supply You Can Count on Worldwide

Our CEE systems comply with European industrial standards and can therefore be seamlessly used within many NATO forces. National variants usually exist only in the civilian sector, not in military power components.

Your advantages in the field:

- High mechanical durability and weather resistance
- Secure contact technology for maximum operational safety
- Modular options for mobile and stationary power supply
- Compatibility in multinational mission environments
- Long-lasting materials for extreme conditions
- Ideal for operations where reliability is a non-negotiable requirement




Reliable Power Supply According to NATO and German Armed Forces Standards

In modern military operations, robust, standard-compliant and always-available power supply is indispensable.

Our CEE connectors offer the highest level of reliability and safety—even under extreme climatic, mechanical, and tactical conditions.

Thanks to the Europe-wide harmonized CEE standards, our products can be seamlessly integrated into multinational NATO infrastructures. They support international interoperability and ensure stable power distribution in mobile field camps, command posts, container systems, and logistical facilities.

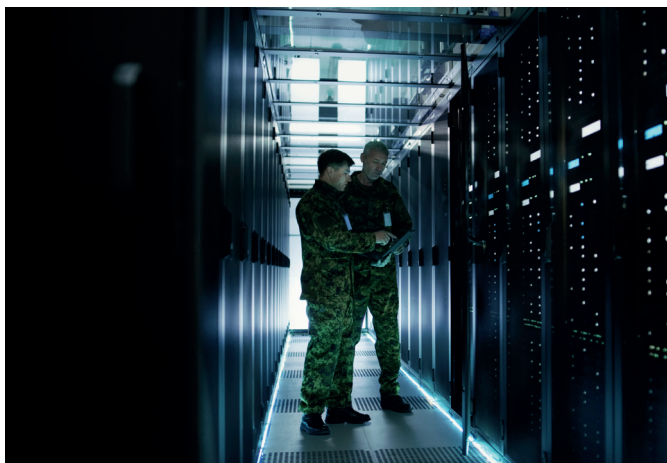

Standardization in Military Environments

In addition to NATO and European industrial standards, individual countries maintain further national defense standards.

In Germany, these include in particular:

VG Numbers (Defense Equipment Type Numbers)

VG numbers identify products that comply with specific military technical standards. They are issued by the German Federal Office of Bundeswehr Equipment (BAAINBw) and define:

- Technical specifications
- Dimensions and interface requirements
- Performance and quality standards

VG standards are comparable to MIL-SPEC in the United States or DEF-STAN in the United Kingdom.

Panel Mounting Socket Outlet straight 16A/32A IP67/IP69

- Screwless terminals
- Straight
- Kontex contact
- High-temperature-resistant contact carrier
- Nickel plated contacts
- Flange 75 x 75 mm
- Protection degree IP67/IP69

(Form AS)


QUICK CONNECT



13066



Ampere	Poles	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	230V 50-60 Hz	400V 50-60 Hz	400V 60 Hz	301-500Hz >50V	each
			3pol 4pol 5pol 6h 9h 9h	3pol 4pol 5pol 9h 6h 6h	4pol 5pol 11h 11h	3pol 4pol 5pol 2h 2h 2h	
16	3	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	13064 320-7272 AS 013			13098 AS 039	150
16	4	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	13928 AS 020	13633 AS 018	13929 AS 021	13930 AS 022	170
16	5	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	13189* AS 002	13065* 300-5324 AS 001	13182* AS 003	13183* AS 004	195
32	3	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	13032 AS 042			13932 AS 044	245
32	4	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	13933 AS 025	13634 AS 023	13166 AS 026	13935 AS 027	265
32	5	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	13297* AS 006	13066* 300-5323 AS 005	13184* AS 007	13175* 321-5242 AS 008	315



4 MB 125

Ampere Poles	16 3	16 4	16 5	32 3	32 4	32 5
a	75,0	75,0	75,0	75,0	75,0	75,0
b	75,0	75,0	75,0	75,0	75,0	75,0
c	60,0	60,0	60,0	60,0	60,0	60,0
d	60,0	60,0	60,0	60,0	60,0	60,0
Øe	5,5	5,5	5,5	5,5	5,5	5,5
f	7,0	7,0	7,0	8,0	8,0	8,0
h	35,0	35,0	35,0	50,0	50,0	50,0
i	57,0	57,0	57,0	69,0	69,0	69,0
k	77,0	83,0	93,0	98,0	98,0	107,0
Øl	45,0	75,0	55,0	60,0	60,0	60,0
m	4,0	7,0	12,0	12,0	12,0	17,0
Cond. mm² min	1,5	1,5	1,5	2,5	2,5	2,5
Cond. mm² max	4,0	4,0	4,0	10,0	10,0	10,0

Panel Mounting Socket Outlet straight 63A/125A IP67/IP69

- Screw terminals
- Straight
- High-temperature-resistant contact carrier
- Box terminals
- Kontex contact
- Nickel plated contacts
- Flange 107 x 100 mm for 63A,
120 x 120 mm for 125A
- Protection degree IP67/IP69


(Form AS)



13067



Ampere	Poles	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	230V 50-60 Hz	400V 50-60 Hz	400V 60 Hz	301-500Hz >50V	each
			3pol 4pol 5pol 6h 9h 9h	3pol 4pol 5pol 9h 6h 6h	4pol 5pol 11h 11h	3pol 4pol 5pol 2h 2h 2h	
63	3	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	13186 AS 047			13927 AS 049	500
63	4	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	13924 AS 030	13839 AS 028	13925 AS 031	13926 AS 032	580
63	5	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	13298* AS 010	13067* 300-3603 AS 009	13187* AS 011	13188* 321-5243 AS 012	620
125	3	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	13840 AS 052			13923 AS 054	930
125	4	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	13919 AS 035	13841 AS 033	13920 AS 036	13921 AS 037	1090
125	5	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	13915 AS 015	13647 AS 014	13916 AS 016	13918 AS 017	1210



4 MB 134

Ampere Poles	63 3	63 4	63 5	125 3	125 4	125 5
a	107,0	107,0	107,0	120,0	120,0	120,0
b	100,0	100,0	100,0	120,0	120,0	120,0
c	85,0	85,0	85,0	100,0	100,0	100,0
d	77,0	77,0	77,0	100,0	100,0	100,0
Øe	6,5	6,5	6,5	6,5	6,5	6,5
f	12,0	12,0	12,0	21,0	21,0	21,0
h	57,0	57,0	57,0	50,0	50,0	50,0
i	77,0	77,0	77,0	117,0	117,0	117,0
k	113,0	113,0	113,0	129,0	129,0	129,0
Øl	88,0	88,0	88,0	104,0	104,0	104,0
m	8,0	8,0	8,0	6,0	6,0	6,0
Cond. mm² min	6,0	6,0	6,0	25,0	25,0	25,0
Cond. mm² max	25,0	25,0	25,0	70,0	70,0	70,0

Technical information

- IEC 60309, EN 60309, VDE 0623, VG 96926
- Colour: olive-green RAL 6031-F9
- * = Approval according to VG 96919

Panel Mounting Socket Outlet angled 16A/32A IP67/IP69

- Screwless terminals
- 20° angled
- Kontex contact
- High-temperature-resistant contact carrier
- Nickel plated contacts
- Flange 85 x 85 mm
- Protection degree IP67/IP69


(Form BS)

QUICK CONNECT


12087



Ampere	Poles	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	230V 50-60 Hz	400V 50-60 Hz	400V 60 Hz	301-500Hz >50V	g
			3pol 4pol 5pol 6h 9h 9h	3pol 4pol 5pol 9h 6h 6h	4pol 5pol 11h 11h	3pol 4pol 5pol 2h 2h 2h	
16	3	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	12085* 347-4131 BS 017			12280 BS 039	155
16	4	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	120025 BS 020	12699 BS 018	120026 BS 021	120027 BS 022	175
16	5	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	12242* BS 002	12086* 300-5324 BS 001	12235* BS 003	12236* BS 004	200
32	3	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	12169 BS 042			120029 BS 044	250
32	4	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	120030 BS 025	12700 BS 023	120031 BS 026	120032 BS 027	275
32	5	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	12340* BS 006	12087* 306-7781 BS 005	12237* BS 007	12238* 311-1928 BS 008	315



4 MB 124

Ampere Poles	16 3	16 4	16 5	32 3	32 4	32 5
a	85,0	85,0	85,0	85,0	85,0	85,0
b	85,0	85,0	85,0	85,0	85,0	85,0
c	70,0	70,0	70,0	70,0	70,0	70,0
d	70,0	70,0	70,0	70,0	70,0	70,0
e	5,5	5,5	5,5	5,5	5,5	5,5
f	8,0	8,0	8,0	8,0	8,0	8,0
h	46,0	46,0	46,0	50,0	50,0	50,0
i	57,0	57,0	60,0	67,0	67,0	67,0
l	57,0	65,0	70,0	78,0	78,0	78,0
α	20°	20°	20°	20°	20°	20°
Cond. mm² min	1,5	1,5	1,5	2,5	2,5	2,5
Cond. mm² max	4,0	4,0	4,0	10,0	10,0	10,0

Panel Mounting Socket Outlet angled 63A/125A IP67/IP69

- Screw terminals
- 20° angled
- High-temperature-resistant contact carrier
- Box terminals
- Kontex contact
- Nickel plated contacts
- Flange 114 x 114 mm
- Protection degree IP67/IP69


(Form BS)



12088



Ampere	Poles	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	230V 50-60 Hz	400V 50-60 Hz	400V 60 Hz	301-500Hz >50V	g
			3pol 4pol 5pol 6h 9h 9h	3pol 4pol 5pol 9h 6h 6h	4pol 5pol 11h 11h	3pol 4pol 5pol 2h 2h 2h	
63	3	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	12239 BS 047			120034 BS 049	555
63	4	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	120035 BS 030	12953 BS 028	120036 BS 031	120037 BS 032	590
63	5	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	12341* BS 010	12088* 347-4133 BS 009	12240* BS 011	12241* BS 012	630
125	3	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	12954 BS 052			120039 BS 054	905
125	4	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	120041 BS 035	12955 BS 033	120042 BS 036	120043 BS 037	965
125	5	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	12342* BS 014	12191* 347-4132 BS 013	12343* BS 015	12264* 347-3942 BS 016	1045



4 MB 123

Ampere Poles	63 3	63 4	63 5	125 3	125 4	125 5
a	114,0	114,0	114,0	114,0	114,0	114,0
b	114,0	114,0	114,0	114,0	114,0	114,0
c	90,0	90,0	90,0	90,0	90,0	90,0
d	90,0	90,0	90,0	90,0	90,0	90,0
e	5,5	5,5	5,5	6,5	6,5	6,5
f	12,0	12,0	12,0	12,0	12,0	12,0
h	65,0	65,0	65,0	82,0	82,0	82,0
i	82,0	82,0	82,0	90,0	90,0	90,0
k	92,0	92,0	92,0	92,0	92,0	92,0
l	92,0	92,0	92,0	105,0	105,0	105,0
m	15°	15°	15°	15°	15°	15°
Cond. mm² min	6,0	6,0	6,0	25,0	25,0	25,0
Cond. mm² max	25,0	25,0	25,0	70,0	70,0	70,0

Plug 16A/32A IP67/IP69


- Screwless terminals
- High-temperature-resistant contact carrier
- Nickel plated contacts
- With protective cap
- Special gland, simultaneous cable gland and seal
- Protection degree IP67/IP69

(Form CP)

QUICK CONNECT
MULTI GRIP



Ampere	Poles	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	230V 50-60 Hz	400V 50-60 Hz	400V 60 Hz	301-500Hz >50V	each
			3pol 6h 9h 9h	3pol 4pol 5pol 9h 6h 6h	4pol 5pol 11h 11h	3pol 4pol 5pol 2h 2h 2h	
16	3	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	21220* 312-5515 CP 017			210403 CP 039	180
16	4	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	210404 CP 020	210077 CP 018	210405 CP 021	210406 CP 022	230
16	5	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	21423* CP 002	21208* 300-3599 CP 001	21424* CP 003	21425* CP 004	265
32	3	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	21221 CP 042			210408 CP 044	340
32	4	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	210409 CP 025	210078 CP 023	210410 CP 026	210411 CP 027	380
32	5	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	21426* CP 006	21209* 300-3596 CP 005	21427* 348-5139 CP 007	21380* 312-4197 CP 008	420



Ampere Poles	16 3	16 4	16 5	32 3	32 4	32 5
Ø a	70,0	78,0	86,0	94,0	94,0	101,0
b	103,5	104,0	105,5	127,0	127,0	129,5
c	153,5	154,0	160,5	187,0	187,0	193,5
d	111,0	111,0	119,0	136,0	136,0	138,5
Ø e	18,0	18,0	21,0	23,5	23,5	27,0
f	75,5	82,5	91,0	96,5	96,5	104,5
Cond. mm² min	1,0	1,0	1,0	2,5	2,5	2,5
Cond. mm² max	2,5	2,5	2,5	6,0	6,0	6,0

21208

2 MB 95

Plug 63A/125A IP67/IP69


- Screw terminals
- High-temperature-resistant contact carrier
- Box terminals
- Nickel plated contacts
- Special gland, simultaneous cable gland and seal
- With protective cap
- Screwless enclosure connection
- Protection degree IP67/IP69

(Form CP)

MULTI GRIP



Ampere	Poles	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	230V 50-60 Hz	400V 50-60 Hz	400V 60 Hz	301-500Hz >50V	each
			3pol 6h 9h 9h	3pol 4pol 5pol 9h 6h 6h	4pol 5pol 11h 11h	3pol 4pol 5pol 2h 2h 2h	
63	3	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	210256 CP 047			210413 CP 049	695
63	4	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	210414 CP 000	210263 CP 028	210415 CP 031	210417 CP 032	755
63	5	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	21428* CP 010	21210* 300-5325 CP 009	21429* CP 0011	21430* CP 012	815
125	3	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	210264 CP 052			210419 CP 054	1115
125	4	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	210421 CP 035	210265 CP 033	210422 CP 036	210423 CP 037	1220
125	5	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	21431* CP 014	21033* 327-8595 CP 013	21432* CP 015	21433* CP 016	1330

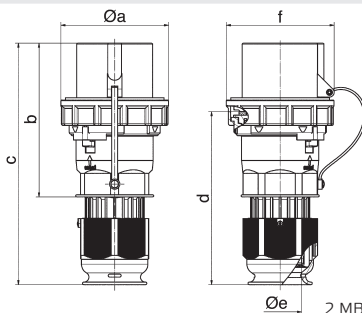

Ampere Poles	63 3	63 4	63 5	125 3	125 4	125 5
Ø a	113,5	113,5	113,5	126,0	126,0	126,0
b	169,0	169,0	169,0	185,0	185,0	185,0
c	250,0	250,0	250,0	286,0	286,0	286,0
d	171,0	171,0	171,0	206,0	206,0	206,0
Ø e	36,0	36,0	36,0	50,0	50,0	50,0
f	112,5	112,5	112,5	125,0	125,0	125,0
Cond. mm² min	6,0	6,0	6,0	16,0	16,0	16,0
Cond. mm² max	25,0	25,0	25,0	50,0	50,0	50,0

21210

2 MB 107

Technical information

- IEC 60309, EN 60309, VDE 0623, VG 96926
- Colour: olive-green RAL 6031-F9
- * = Approval according to VG 96919


Appliance Inlet with flange 16A/32A IP67/IP69

- Screw terminals
- High-temperature-resistant contact carrier
- Nickel plated contacts
- With protective cap
- Flange 85 x 85 mm
- Protection degree IP67/IP69

(Form BP)



Ampere	Poles	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	230V 50-60 Hz	400V 50-60 Hz	400V 60 Hz	301-500Hz >50V	each
			3pol 4pol 5pol 6h 9h 9h	3pol 4pol 5pol 9h 6h 6h	4pol 5pol 11h 11h	3pol 4pol 5pol 2h 2h 2h	
16	3	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	27046* 319-7028 BP 013			27286 BP 039	205
16	4	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	27287 BP 020	27204 BP 018	27288 BP 021	27289 BP 022	230
16	5	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	27104* BP 002	2702* 300-3598 BP 001	27105* BP 003	27106* BP 004	260
32	3	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	2745 BP 042			27291 BP 044	305
32	4	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	27292 BP 025	27201 BP 023	27293 BP 026	27294 BP 027	330
32	5	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	27107* BP 006	2703* 188-9997 BP 005	27108* BP 007	27043* 312-4197 BP 008	365

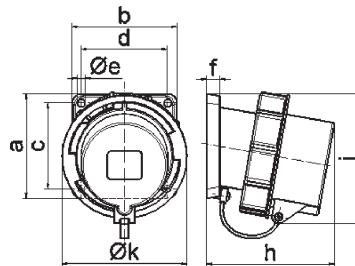

Ampere	16	16	16	32	32	32
Poles	3	4	5	3	4	5
a	85,0	85,0	85,0	85,0	85,0	85,0
b	85,0	85,0	85,0	85,0	85,0	85,0
c	70,0	70,0	70,0	70,0	70,0	70,0
d	70,0	70,0	70,0	70,0	70,0	70,0
e	6,3	6,3	6,3	6,3	6,3	6,3
f	11,0	11,0	11,0	11,0	11,0	11,0
h	94,0	94,0	94,0	105,0	105,0	105,0
i	94,0	97,0	101,0	103,0	103,0	107,0
k	70,5	78,5	86,5	94,0	94,0	101,5
Cond. mm² min	1,0	1,0	1,0	2,5	2,5	2,5
Cond. mm² max	2,5	2,5	2,5	6,0	6,0	6,0

2703

5 MB 31


Appliance Inlet with flange 63A/125A IP67/IP69

- Screw terminals
- High-temperature-resistant contact carrier
- Box terminals
- Nickel plated contacts
- With protective cap
- Flange 107 x 100 mm for 63A, 130 x 120 mm for 125A
- Protection degree IP67/IP69

(Form BP)



Ampere	Poles	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	230V 50-60 Hz	400V 50-60 Hz	400V 60 Hz	301-500Hz >50V	each
			3pol 4pol 5pol 6h 9h 9h	3pol 4pol 5pol 9h 6h 6h	4pol 5pol 11h 11h	3pol 4pol 5pol 2h 2h 2h	
63	3	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	27267 BP 047			27295 BP 049	630
63	4	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	27296 BP 030	27268 BP 028	27297 BP 031	27298 BP 032	695
63	5	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	27109* BP 010	2704* BP 009	27110* BP 011	27045* BP 012	750
125	3	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	27269 BP 052			27299 BP 054	1010
125	4	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	27300 BP 035	27270 BP 033	27301 BP 036	27302 BP 037	1125
125	5	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	27303 BP 015	27102 300-5323 BP 014	27304 BP 016	27305 321-5242 BP 017	1220



Ampere	63	63	63	125	125	125
Poles	3	4	5	3	4	5
a	107,0	107,0	107,0	130,0	130,0	130,0
b	100,0	100,0	100,0	120,0	120,0	120,0
c	85,0	85,0	85,0	108,0	108,0	108,0
d	77,0	77,0	77,0	100,0	100,0	100,0
e	6,5	6,5	6,5	6,5	6,5	6,5
f	12,0	12,0	12,0	13,0	13,0	13,0
h	142,0	142,0	142,0	134,0	134,0	134,0
i	124,0	124,0	124,0	138,0	138,0	138,0
k	113,5	113,5	113,5	126,0	126,0	126,0
l	-	-	-	23,0	23,0	23,0
m	-	-	-	105,0	105,0	105,0
Cond. mm² min	6,0	6,0	6,0	16,0	16,0	16,0
Cond. mm² max	16,0	16,0	16,0	50,0	50,0	50,0

2704

5 MB 100

Appliance Inlet with flange 16A/32A IP67/IP69

- Screw terminals
- High-temperature-resistant contact carrier
- Nickel plated contacts
- With protective cap
- Flange 85 x 85 mm
- Protection degree IP67/IP69


(Form AP)



2897



Ampere	Poles	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	230V 50-60 Hz		400V 50-60 Hz		400V 60 Hz		301-500Hz >50V			g
			3pol 6h	4pol 9h	3pol 9h	4pol 6h	5pol 11h	4pol 11h	3pol 2h	4pol 2h	5pol 2h	
16	3	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	2892		2893		2894		2895			210
			AP 037		AP 017		AP 001		AP 042			
16	4	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	2895		2896		2897		2898			259
			AP 042		AP 022		AP 005		AP 005			
32	3	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	2895		2896		2897		2898			302
			AP 042		AP 022		AP 005		AP 005			
32	4	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	2895		2896		2897		2898			360
			AP 042		AP 022		AP 005		AP 005			
32	5	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	2895		2896		2897		2898			
			AP 042		AP 022		AP 005		AP 005			



5 MB 73

Ampere Poles	16 3	16 4	16 5	32 3	32 4	32 5
a	85,0	85,0	85,0	85,0	85,0	85,0
b	85,0	85,0	85,0	85,0	85,0	85,0
c	70,0	70,0	70,0	70,0	70,0	70,0
d	70,0	70,0	70,0	70,0	70,0	70,0
Ø e	6,3	6,3	6,3	6,3	6,3	6,3
f	11,0	11,0	11,0	11,0	11,0	11,0
h	84,0	84,0	85,0	94,0	94,0	94,0
i	82,5	86,0	91,0	96,5	96,05	104,0
Ø k	70,5	78,5	86,5	94,0	94,0	101,5
Ø l	49,0	49,0	49,0	49,0	49,0	49,0
Cond. mm² min	1,0	1,0	1,0	2,5	2,5	2,5
Cond. mm² max	2,5	2,5	2,5	6,0	6,0	6,0

Appliance Inlet with flange 63A/125A IP67/IP69

- Screw terminals
- High-temperature-resistant contact carrier
- Box terminals
- Nickel plated contacts
- With protective cap
- Flange 110 x 106 mm for 63A,
flange 120 x 120 mm for 125A
- Protection degree IP67/IP69


(Form AP)



2853



Ampere	Poles	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	230V 50-60 Hz		400V 50-60 Hz		400V 60 Hz		301-500Hz >50V			g
			3pol 6h	4pol 9h	3pol 9h	4pol 6h	5pol 11h	4pol 11h	3pol 2h	4pol 2h	5pol 2h	
63	3	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	28042		28043		28044		28045			725
			AP 047		AP 052		AP 032		AP 013			
63	4	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	28042		28043		28044		28045			
			AP 047		AP 052		AP 032		AP 013			
63	5	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	28042		28043		28044		28045			
			AP 047		AP 052		AP 032		AP 013			
125	3	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	28042		28043		28044		28045			
			AP 047		AP 052		AP 032		AP 013			
125	4	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	28042		28043		28044		28045			
			AP 047		AP 052		AP 032		AP 013			
125	5	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	28042		28043		28044		28045			
			AP 047		AP 052		AP 032		AP 013			



5 MB 101

Ampere Poles	63 3	63 4	63 5	125 3	125 4	125 5
a	110,0	110,0	110,0	120,0	120,0	120,0
b	106,0	106,0	106,0	120,0	120,0	120,0
c	90,0	90,0	90,0	100,0	100,0	100,0
d	90,0	90,0	90,0	100,0	100,0	100,0
Ø e	5,5	5,5	5,5	6,5	6,5	6,5
f	13,0	13,0	13,0	13,0	13,0	13,0
h	114,0	114,0	114,0	121,0	121,0	121,0
i	19,0	19,0	19,0	20,0	20,0	20,0
Ø k	113,5	113,5	113,5	126,0	126,0	126,0
Ø m	93,0	93,0	93,0	104,0	104,0	104,0
Cond. mm² min	6,0	6,0	6,0	16,0	16,0	16,0
Cond. mm² max	16,0	16,0	16,0	50,0	50,0	50,0

Technical information

- IEC 60309, EN 60309, VDE 0623, VG 96926
- Colour: olive-green RAL 6031-F9
- * = Approval according to VG 96919

Connector 16A/32A IP67/IP69

- Screwless terminals
- Kontex contact
- High-temperature-resistant contact carrier
- Nickel plated contacts
- Special gland, simultaneous cable gland and seal
- Protection degree IP67/IP69


(Form DS)

QUICK CONNECT
MULTI GRIP


3151

		Order no.	230V 50-60 Hz			400V 50-60 Hz			400V 60 Hz			301-500Hz >50V			9 each
			3pol 6h	4pol 9h	5pol 9h	3pol 9h	4pol 6h	5pol 6h	4pol 11h	5pol 11h		3pol 2h	4pol 2h	5pol 2h	
16	3	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	31162* 312-5516 DS 017									310163 DS 039			180
16	4	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	310165 DS 020			31865 DS 018			310167 DS 021			310168 DS 022			215
16	5	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	31318* DS 002			31150* DS 001			31319* DS 003			31320* DS 004			255
32	3	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	31032 DS 042									310194 DS 044			325
32	4	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	310169 DS 025			31866 DS 023			310171 DS 026			310172 DS 027			355
32	5	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	31321* DS 006			31151* 300-3597 DS 005			31322* DS 007			31323* 312-4196 DS 008			410

Ampere	16	16	16	32	32	32
Poles	3	4	5	3	4	5
Ø a	70,5	78,0	86,5	94,0	94,0	101,5
b	161,0	161,0	168,0	196,0	196,0	200,0
c	77,0	83,0	93,0	99,0	99,0	107,0
Ø d	18,0	18,0	21,0	23,0	23,0	27,0
Cond. mm² min	1,0	1,0	1,0	2,5	2,5	2,5
Cond. mm² max	2,5	2,5	2,5	6,0	6,0	6,0



3 MB 70

Connector 63A/125A IP67/IP69

- Screw terminals
- High-temperature-resistant contact carrier
- Box terminals
- Kontex contact
- Nickel plated contacts
- Special gland, simultaneous cable gland and seal
- Screwless enclosure connection
- Protection degree IP67/IP69


(Form DS)

MULTI GRIP


31152

		Order no.	230V 50-60 Hz			400V 50-60 Hz			400V 60 Hz			301-500Hz >50V			9 each
			3pol 6h	4pol 9h	5pol 9h	3pol 9h	4pol 6h	5pol 6h	4pol 11h	5pol 11h		3pol 2h	4pol 2h	5pol 2h	
63	3	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	310058 DS 047									310177 DS 049			760
63	4	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	310174 DS 030			31877 DS 028			310175 DS 031			310176 DS 032			770
63	5	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	31324* DS 010			31152* 300-5326 DS 009			31325* DS 011			31326* DS 012			785
125	3	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	310059 DS 052									310179 DS 054			1160
125	4	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	310180 DS 035			310060 DS 033			310182 DS 036			310183 DS 037			1255
125	5	Order no. Supply no. 5935-12-... VG-type-Nr. VG 96919...	31327* DS 014			31027* 322-8597 DS 013			31328* DS 015			31329* DS 016			1350

Ampere	63	63	63	125	125	125
Poles	3	4	5	3	4	5
Ø a	110,0	110,0	110,0	125,0	125,0	125,0
b	263,0	263,0	263,0	300,0	300,0	300,0
c	113,0	113,0	113,0	128,0	128,0	128,0
Ø d	36,0	36,0	36,0	50,0	50,0	50,0
Cond. mm² min	6,0	6,0	6,0	16,0	16,0	16,0
Cond. mm² max	16,0	16,0	16,0	50,0	50,0	50,0



3 MB 125

- IEC 60309, EN 60309, VDE 0623, VG 96926
- Colour: olive-green RAL 6031-F9
- * = Approval according to VG 96919


Domestic Panel Mounting Socket Outlet IP68

- Screw terminals
- Nickel plated contacts
- 16A/230 V~
- Flange 75 x 75 mm
- Protection degree IP68

(Form AS)



7108



18 MB 19

	Ref. no.	Supply no. 5935-12-...	VG-type-Nr. VG 96926...
System F	7108*	312-5115	AS 001
System E	7185		


Domestic Panel Mounting Socket Outlet IP68

- Screw terminals
- Nickel plated contacts
- 16A/230 V~
- Protection degree IP68

(Form BS)



7115



18 MB 21

	Ref. no.	Supply no. 5935-12-...	VG-type-Nr. VG 96926...
System F	7115*	314-4770	BS 001
System E	7186		


Domestic Plug IP68

- Screw terminals
- Nickel plated contacts
- 16A/230 V~
- With closure cap
- Protection degree IP68

(Form CP)



735



18 MB 18

	Ref. no.	Supply no. 5935-12-...	VG-type-Nr. VG 96926...
	735*	141-3149	CP 001


Domestic Appliance Inlet with Flange IP68

- Screw terminals
- Nickel plated contacts
- 16A/230 V~
- With closure cap
- Flange 75 x 75 mm
- Protection degree IP68

(Form AP)



753



18 MB 16

	Ref. no.	Supply no. 5935-12-...	VG-type-Nr. VG 96926...
	753*	340-7272	AP 001


Domestic Connector IP68

- Screw terminals
- Nickel plated contacts
- 16A/230 V~
- Protection degree IP68

(Form DS)



745



18 MB 26


	Ref. no.	Supply no. 5935-12-...	VG-type-Nr. VG 96926...
System F	745*	314-4771	DS 001
System E	7424		

Technical information

- IEC 60309, EN 60309, VDE 0623, VG 96926
- Colour: olive-green RAL 6031-F9
- * = Approval according to VG 96919

Domestic 3-way connector IP68

- Screw terminals
- Nickel plated contacts
- 16A/230 V~
- With closure cap, hanging bracket, cable gland
- Protection degree IP68

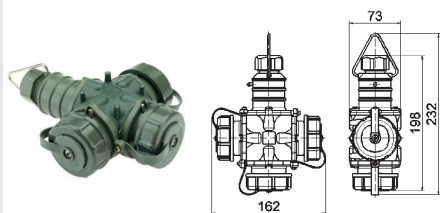

7400

18 MB 27

Ref. no. Supply no. VG-type-Nr.
5935-12-... VG 96926...

System F **7400** 123-0129 04ES

System E **7423**

Extension cable 16A IP67/IP69

With plug and connector 16A 5p. 6h

- Protection degree IP67/IP69


Lenght Ref. no. Supply no. VG-type-Nr.
5935-12-... VG 96926...

H07RN-F5G2,5 5m **810038**

H07RN-F5G2,5 10m **810064**

H07RN-F5G2,5 25m **810065**

H07RN-F5G2,5 50m **810066**

Extension cable 32A IP67/IP69

With plug and connector 32A 5p. 6h

- Protection degree IP67/IP69


Lenght Ref. no. Supply no. VG-type-Nr.
5935-12-... VG 96926...

H07RN-F5G6 5m **810067**

H07RN-F5G6 10m **810068**

H07RN-F5G6 25m **810069**

H07RN-F5G6 50m **810070**

Extension cable 63A IP67/IP69

With plug and connector 63A 5p. 6h

- Protection degree IP67/IP69


Lenght Ref. no. Supply no. VG-type-Nr.
5935-12-... VG 96926...

H07RN-F5G16 5m **810071**

H07RN-F5G16 10m **810072**

H07RN-F5G16 25m **810073**

H07RN-F5G16 50m **810074**

Extension cable domestic type IP68

With domestic type plug and connector, system F

- Protection degree IP68


Lenght Ref. no. Supply no. VG-type-Nr.
5935-12-... VG 96926...

H07RN-F3G 3m **810048**

H07RN-F3G 5m **810037**

Technical information

- IEC 60309, EN 60309, VDE 0623, VG 96926
- Colour: olive-green RAL 6031-F9
- * = Approval according to VG 96919

Domestic 3-way connector with extension cable IP68

With domestic type plug and connector, system F

- Protection degree IP68



	Lenght	Ref. no.	Supply no. 5935-12-...	VG-type-Nr. VG 96926...
H07RN-F3G	1,5m	810053		

Closure Cap with Strap

- for CEE plugs



8337

Ampere / Poles	Ref. no.	Supply no. 5935-12-...	VG-type-Nr. VG 96926...
16A / 3p	8335		
16A / 4p	8336		
16A / 5p	8337		
32A / 3p, 4p	8338		
32A / 5p	8339		
63A / 3p, 4p, 5p	8340		
125A / 3p, 4p, 5p	8341		

Closure Cap with Strap

- for CEE connector
- for CEE Panel Mounting Socket Outlet



8330

Ampere / Poles	Ref. no.	Supply no. 5935-12-...	VG-type-Nr. VG 96926...
16A / 3p	8328		
16A / 4p	8329		
16A / 5p	8330		
32A / 3p, 4p	8331		
32A / 5p	8332		
63A / 3p, 4p, 5p	8333		
125A / 3p, 4p, 5p	8334		

Closure Cap

- for CEE plugs
- Form G



8326

Ampere / Poles	Ref. no.	Supply no. 5935-12-...	VG-type-Nr. VG 96926...
16A / 3p	8318*		G-16-3
16A / 4p	8326		G-16-4
16A / 5p	8314*		G-16-5
32A / 3p, 4p	8327		G-32-4
32A / 5p	8315*	304-8143	G-32-5
63A / 3p, 4p, 5p	8316*		G-63-5
125A / 3p, 4p, 5p	8317*		G-125-5

Closure Cap

- for CEE connector
- Form F




8309

Ampere / Poles	Ref. no.	Supply no. 5935-12-...	VG-type-Nr. VG 96926...
16A / 3p	8313*		F-16-3
16A / 4p	8324		F-16-4
16A / 5p	8309*		F-16-5
32A / 3p, 4p	8325		F-32-4
32A / 5p	8310*		F-32-5
63A / 3p, 4p, 5p	8311*		F-63-5
125A / 3p, 4p, 5p	8312*		F-125-5

Hinged Window

- Self-closing
- With touch protection
- With option for lock set




58110

30 MB 96

Module units	Dimension a	Dimension b	Ref. no.
2	55,0	40,5	580138
4	91,0	76,5	58388
6	127,0	112,5	58590
8	162,0	147,5	58110
12	234,0	220,0	58111
13	257,5	248,5	58387

Hinged Window

- Self-closing
- Without touch protection
- With option for lock set

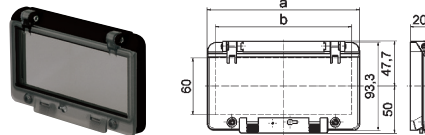


58502

30 MB 95

Module units	Dimension a	Dimension b	Ref. no.
2	55,0	37,0	58511
4	91,0	73,0	580020
6	127,0	109,0	58503
8	162,0	144,5	58502
12	234,0	217,0	58602
13	257,5	240,0	58607

Hinged Window

- Self-closing
- With touch protection
- With option for lock set
- With mounting bracket



580143

30 MB 97

Module units	Dimension a	Dimension b	Ref. no.
2	55,0	40,5	580137
4	91,0	76,5	58517
6	127,0	112,5	580141
8	162,0	147,5	580143
12	234,0	220,0	580144
13	257,5	248,5	580145

Closure Cap

- for domestic plug
- Form H



8320

Ref. no. VG-Typ-Nr.
8320* H-16

Closure Cap

- für domestic connector
- Form G



8319

Ref. no. VG-type-Nr.
8319* G-16

Closure Cap with retaining strap


- for domestic plug
- Form H
- with retaining strap and screw



Ref. no. VG-Typ-Nr.
580411 VG 96926...

Closure Cap with retaining strap

- für domestic connector
- Form G
- with retaining strap and screw



8359

Ref. no. VG-type-Nr.
8359 VG 96926...

Extension cable on cable reel

- cable length 25 m
- cable type H07RN-F3G2.5
- Cable reel with brake and cable guide
- Insulation class II
- Protection rating IP67

Components:

4 domestic sockets 16A, 230V, IP68
(system F - German earthing system)

Input:

1 domestic plug 16A 230V, IP68/IP69

Order no. **860127P**



Extension cable on cable reel

- cable length 50 m
- cable type H07RN-F3G2.5
- Cable reel with brake and cable guide
- Insulation class II
- Protection rating IP67

Components:

4 domestic sockets 16A, 230V, IP68
(system F - German earthing system)

Input:

1 domestic plug 16A 230V, IP68

Order no. **860156P**



Portable distribution box

- housing made of high-quality butyl rubber
- 365 × 120 mm
- Protection rating IP67
- Insulation class II

Components:

6 domestic sockets 16A, 230V, IP68
(system F - German earthing system)

Input:

5 m cable H07RN-F3G2.5 with domestic plug 16A 230V, IP68

Order no. **530097P**



Portable distribution box

- housing made of high-quality butyl rubber
- 365 × 120 mm
- Protection rating IP67
- Insulation class II

Components:

3 domestic sockets 16A, 230V, IP68
(system F - German earthing system)

Fuse:

1 RCD 25A / 0.03A, 2-pole 2 MCBs B16, 1-pole

Input:

10 m cable H07RN-F3G2.5 with domestic plug 16A 230V, IP68

Order no. **530075P**



Portable distribution box

- housing made of high-quality butyl rubber
- 455 x 146 mm
- Protection rating IP67
- Insulation class II

Components:

6 domestic sockets 16A, 230V, IP68
(system F - German earthing system)

Fuse:

3 MCBs 10A, 1p 1 surge arrester Type 3

Input:

2 m cable H07RN-F3G2.5 with domestic plug 16A 230V, IP68

Order no. **55158**



Components:

2 domestic sockets 16A, 230V, IP68
(system F - German earthing system)
2 CEE sockets 16A, 400V, 5p, 6h, IP67/IP69
2 CEE sockets 32A, 400V, 5p, 6h, IP67/IP69

Fuse:

2 RCD/MCB combinations 16A / 0.03A, 1p+N, Type A
2 MCBs 16A, 3p 2 MCBs 32A, 3p
1 RCD 40A / 0.03A, 4p 1 surge arrester Type 1+2 / 3+1 circuit

Additional equipment:

1 M12 pressure equalization element, black
1 external earthing

Input:

1 CEE appliance inlet 63A, 400V, 5p, 6h, IP67

Order no. **5204053**

EVOBOX-L
600 x 545 x 400 mm



Components:

3 domestic sockets 16A, 230V, IP68
(system F - German earthing system)
2 CEE sockets 16A, 400V, 5p, 6h, IP67/IP69
2 CEE sockets 32A, 400V, 5p, 6h, IP67/IP69
2 CEE sockets 63A, 400V, 5p, 6h, IP67/IP69
1 CEE socket 125A, 400V, 5p, 6h, IP67/IP69

Fuse:

3 MCBs 16A, 1p 2 MCBs 16A, 3p
2 MCBs 32A, 3p 2 MCBs 63A, 3p

Input:

1 CEE appliance inlet 125A, 400V, 5p, 6h, IP67/IP69

Order no. **5203974**

EVOBOX-L
600 x 545 x 400 mm



Components:

6 domestic sockets 16A, 230V, IP68
(system F - German earthing system)

Fuse:

6 RCD/MCB combinations 16A / 0.03A, 1p+N, Type A
4 surge arresters Type 2, 1p

Additional equipment:


1 M12 pressure equalization element, black
1 external earthing

Input:

1 m cable H07RN-F5G6 with 1 CEE plug 32A, 400V, 5p, 6h, IP67/IP69

Order no. **5204046**

EVOBOX-S
400 x 340 x 350 mm



 made
 in
 Germany



Simply. Well. Connected.

Bals Elektrotechnik GmbH & Co. KG
D-57399 Kirchhundem-Albaum
Phone: +49 27 23/771-0
Fax: +49 27 23/771-177/178
E-mail: info@bals.com
Internet: www.bals.com

Subject to technical modifications and typographical errors